

Kit 78528

Mitsubishi EVO 7/8/9

Front Application



INSTALLATION GUIDE

For maximum effectiveness and safety, please read these instructions completely before proceeding with installation.

Failure to read these instructions can result in an incorrect installation.

TABLE OF CONTENTS

Introduction	2
Notation Explanation	.2
Important Safety Notices	.2
Installation Diagram	
Hardware List	.3
Installing the Air Suspension	
Preparing the Vehicle	
Removing the Stock Suspension	
Damping Adjustment	
Aligning the Vehicle	
Adjusting Extended or Drop Height Using Lower Mount	.8
Before Operating	10
Installation Checklist	
Product Use, Maintenance and Servicing	11
Suggested Driving and Maximum Air Pressures	
Maintaining and Operating	
Troubleshooting Guide	11
Frequently Asked Questions	11
Tuning the Air Pressure	12
Checking for Leaks	12
Fixing Leaks	
Warranty & Return Policy	
Replacement Information	
•	
Contact Information	13



Introduction

The purpose of this publication is to assist with the installation, maintenance and troubleshooting of this Mitsubishi EVO 7/8/9 Performance kit.

It is important to read and understand the entire installation guide before beginning installation or performing any maintenance, service or repair. The information includes a hardware list, step-by-step installation information, maintenance tips, safety information and a troubleshooting guide.

Air Lift Performance reserves the right to make changes and improvements to its products and publications at any time. For the latest version of this manual, contact Air Lift Performance at (800) 248-0892 or visit our website at www.airliftperformance.com.

NOTATION EXPLANATION

Hazard notations appear in various locations in this publication. Information which is highlighted by one of these notations must be observed to help minimize risk of personal injury or possible improper installation which may render the vehicle unsafe. Notes are used to help emphasize areas of procedural importance and provide helpful suggestions. The following definitions explain the use of these notations as they appear throughout this guide.



INDICATES IMMEDIATE HAZARDS WHICH WILL RESULT IN SEVERE PERSONAL INJURY OR DEATH.



INDICATES HAZARDS OR UNSAFE PRACTICES WHICH COULD RESULT IN SEVERE PERSONAL INJURY OR DEATH.



INDICATES HAZARDS OR UNSAFE PRACTICES WHICH COULD RESULT IN DAMAGE TO THE MACHINE OR MINOR PERSONAL INJURY.

NOTE

Indicates a procedure, practice or hint which is important to highlight.

IMPORTANT SAFETY NOTICES

The installation of this kit does not alter the Gross Vehicle Weight Rating (GVWR) or payload of the vehicle. Check your vehicle's owner's manual and do not exceed the maximum load listed for your vehicle.

Gross Vehicle Weight Rating: The maximum allowable weight of the fully loaded vehicle (including passengers and cargo). This number — along with other weight limits, as well as tire, rim size and inflation pressure data — is shown on the vehicle's Safety Compliance Certification Label.

Payload: The combined, maximum allowable weight of cargo and passengers that the vehicle is designed to carry. Payload is GVWR minus the Base Curb Weight.




DO NOT INFLATE AIR SPRINGS WHILE OFF OF THE VEHICLE. DAMAGE TO ASSEMBLY MAY RESULT AND VOID WARRANTY.



DO NOT WELD TO, OR MODIFY PERFORMANCE STRUTS/SHOCKS IN ANY WAY.
DAMAGE TO UNIT MAY OCCUR AND WILL VOID WARRANTY.



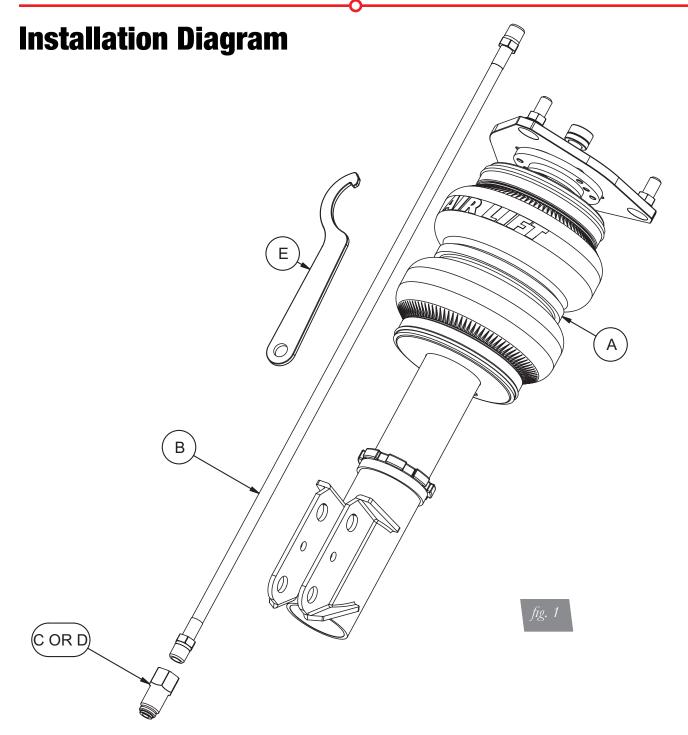

HARDWARE LIST

A B C	Part # 35321 20997 21810	Description Qty ASM, Strut, Evo 7/8/9 Front 2 Leader Hose, 1/4" ID 2 Union, 1/4"FNPT X 1/4" PTC, DOT 2
D E	21987	Union, 1/4 FNPT X 1/4 FTC, DOT

STOP!

Missing or damaged parts? Call Air Lift customer service at (800) 248-0892 for a replacement part.

Installing the Air Suspension

PREPARING THE VEHICLE

- 1. Elevate and support the vehicle from approved lifting points.
- 2. Remove the front wheels (fig. 2).



REMOVING THE STOCK SUSPENSION

1. Remove the nut holding the brake line bracket to the strut (fig. 3).











2. Remove the two lower strut mount bolts (figs. 4-6).






3. Unthread the three upper mount nuts and remove the strut from the vehicle (figs. 7 & 8).

AIR SUSPENSION INSTALLATION

1. Begin by installing the leader line into the air spring. Apply thread sealant to the threads of the leader hose. Tighten the appropriate fitting to the air line (one and three-quarter turns beyond hand-tight). Tighten the leader line into the air spring (one and three-quarter turns beyond hand-tight) (fig. 9).

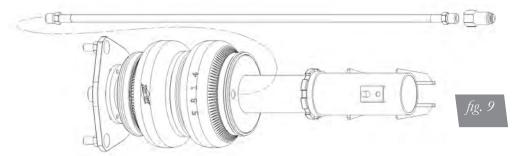

2. Attach the camber plate to the strut tower and torque nuts to 45 Nm (33 ft-lbs.) (fig. 10).



MN-958 5



3. Reinstall the lower mount bolts through the strut mount connection (figs. 11 & 12). Torque to 167 Nm (123 ft-lbs.).





4. Attach the brake line bracket to the strut (fig. 13).



- 5. Fully compress the suspension using a jack. With the suspension compressed, review the best routing for the leader hose that is clear of all suspension components and axle. Routing should also allow for the suspension to extend without kinking or pulling the line tight or rubbing on other components. Following the brake line routing is often a good place to start. Check clearances to all other components.
- 6. With the suspension fully compressed, take a measurement from the fender to some reference point typically the center of the axle. Record this measurement as Max Compression.
- 7. Cycle the suspension to Max Extension and record the measurement from the same reference points.
- 8. Add ME and MC then divide by 2. Set the suspension to this point. This position will give 50% stroke in either direction and is a starting point for ride height (fig. 14).

Formula for Calculating Ride Height

(ME+MC)÷2=MID STROKE





TORQUE SPEC	IFICATIONS	
LOCATION	NM	FT-LBS.
CAMBER PLATE TO CHASSIS NUTS	45	33
STRUT LOWER MOUNT BOLT/NUTS	167	123
WHEEL LUGS	98 +/-10	73 +/-7
AIR FITTING (USE THREAD SEALANT)	1-AND-3/4 TURNS BI	EYOND HAND-TIGHT

Table 1

DAMPING ADJUSTMENT

The struts in this kit have 30 settings, or "clicks", of adjustable compression and rebound damping characteristics. Damping is changed through the strut rod using the supplied adjuster (figs. 15 & 16) or a 3mm allen wrench.

Turn the adjuster clockwise and the damping settings are hardened. Turn the adjuster counterclockwise and the damping is softened.

Each strut is preset to "-20 clicks". This means that the strut is adjusted 20 clicks away from full stiff. Counting down from full stiff is the preferred method of keeping track of, or setting, damping. This setting was developed on a 2006 EVO 9 MR and may need to be adjusted to different vehicles and driving characteristics.



ALIGNING THE VEHICLE

- 1. Using the control system, set the vehicle height to the new custom ride height.
- If the custom ride height is lower than stock, we recommend loosening all pivot points (bolts, nuts) on any control arm, strut arm or radius rod that contains bushings. Once they have been loosened, re-torque to stock specifications.

NOTE

It may be necessary to cycle the suspension to loosen the bushing up from its mount. This will help re-orient the bushing at its new position and increase life of the bushings based on the custom ride height.


MN-958 7



ADJUSTING EXTENDED OR DROP HEIGHT USING LOWER MOUNT

Your struts have been pre-set at the factory to provide maximum drop height while maintaining adequate tire clearance to the air spring. If you wish to gain more extended height (lift), which is the same as reducing drop height, or want to lower the chassis further and there is still adjustment available at the lower mount, please use the following procedure:

- 1. Support the vehicle with jack stands or a hoist at approved lifting points.
- 2. Remove the wheel.
- 3. Using the supplied spanner wrench, loosen the lower locking collar (fig. 17).

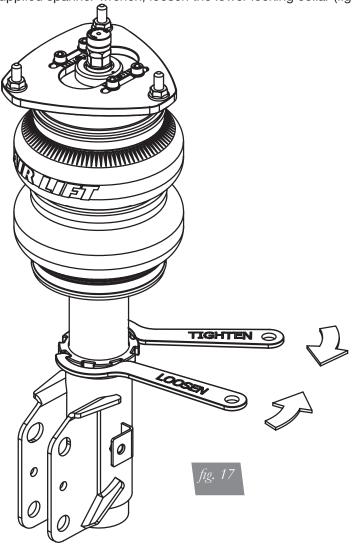

- 4. Deflate the air spring to 0 PSI on the corner you are adjusting.
- 5. Disconnect lower mount from suspension.
- 6. Spin the lower mount to the desired location.

NOTE

Not all models will have further drop height available.

- 7. Re-install lower mount to suspension and torque fasteners.
- 8. Tighten the lower locking collar to the lower mount using significant force.





WHEN ADJUSTING HEIGHT UPWARDS, MAKE SURE THAT THE STRUT BODY ENGAGES ALL THE THREADS OF THE LOWER MOUNT (FIG. 18). WHEN ADJUSTING DOWNWARDS, MAKE SURE THERE IS ADEQUATE AIR SPRING CLEARANCE TO THE TIRE/WHEEL ASSEMBLY. CLEARANCE MUST BE CHECKED WITH SYSTEM FULLY DEFLATED AS WELL AS FULLY INFLATED TO ENSURE THAT NO RUBBING OCCURS. FAILURE TO MAINTAIN ADEQUATE CLEARANCE CAN RESULT IN AIR SPRING FAILURE AND WILL NOT BE COVERED UNDER WARRANTY.

A CAUTION

DO NOT ADJUST HEIGHT BY SPINNING AIR SPRING ON STRUT! DOING SO MAY CAUSE AN AIR LEAK AND COMPROMISE THE ASSEMBLY.

FOR STRUTS: FOR SHOCKS: Thread MUST be showing in window.

Not OK, threads

are showing.

MN-958 9

OK, no threads

showing.



Before Operating



MAKE SURE THE FRONT WHEELS ARE STRAIGHT WHEN DEFLATING AND REINFLATING AIR BAGS.

- 1. Inflate and deflate the system (do not exceed 125 PSI) to check for clearance or binding issues. With the air springs deflated, check clearances on everything so as not to pinch brake lines, vent tubes, etc. Clear lines if necessary.
- 2. Inflate the air springs to 75-90 PSI and check all connections for leaks.
- 3. Air Lift part #27669 or #27671, AutoPilot V2 Air Management System, is highly recommended for this product.
- 4. Please familiarize yourself further with this product by reading the Product Use, Maintenance and Servicing section.

INICTAL	LATION		ICT
INSTAL	LAHUN	I CHECKI	LI

	Clearance test — Inflate the air springs to 75-90 PSI and make sure there is at least 1/2" clearance from anything that might rub against each sleeve. Be sure to check the tire, brake drum, frame, shock absorbers and brake cables.
	Leak test before road test — Inflate the air springs to 75-90 PSI and check all connections for leaks. All leaks must be eliminated before the vehicle is road tested.
	Heat test — Be sure there is sufficient clearance from heat sources, at least 6 " for air springs and air lines. If a heat shield was included in the kit, install it. If there is no heat shield, but one is required, call Air Lift customer service at (800) 248-0892.
	Fastener test — Recheck all bolts for proper torque.
	Road test — The vehicle should be road tested after the preceding tests. Inflate the springs to recommended driving pressures. Drive the vehicle 10 miles and recheck for clearance, loose fasteners and air leaks.
	Operating instructions — If professionally installed, the installer should review the
	operating instructions with the owner. Be sure to provide the owner with all of the paperwork that came with the kit.
Te	·
	paperwork that came with the kit.
D	paperwork that came with the kit.
D	paperwork that came with the kit. echnician's Signature ate
Di	paperwork that came with the kit. chnician's Signature ate POST-INSTALLATION CHECKLIST Overnight leak down test — Recheck air pressure after the vehicle has been used for 24 hours. If the pressure has dropped more than 5 PSI, then there is a leak that must



Product Use, Maintenance and Servicing

Suggested Driving Air Pressure	Maximum Air Pressure
40-50 PSI	125 PSI
EALL LIDE TO MAINITAIN ADEQUATE M	INIMI IM DDECCLIDE (OD DDECCLIDE

FAILURE TO MAINTAIN ADEQUATE MINIMUM PRESSURE (OR PRESSURE PROPORTIONAL TO LOAD) WILL RESULT IN BOTTOMING OUT, OVER-EXTENSION OR RUBBING AGAINST ANOTHER COMPONENT AND WILL **VOID THE WARRANTY**.

MAINTENANCE GUIDELINES

NOTE

By following these steps, vehicle owners will obtain the longest life and best results from their air spring.

- 1. Check the air pressure before driving.
- 2. Never inflate beyond 125 PSI.
- 3. If you develop an air leak in the system, use a soapy water solution to check all air line connections, before deflating and removing the spring.
- 4. When increasing load, always adjust the air pressure to maintain normal ride height. Increase or decrease pressure from the system as necessary to attain normal ride height for optimal ride and handling. Remember that loads carried behind the axle (including tongue loads) require more leveling force (pressure) than those carried directly over the axle.



FOR YOUR SAFETY AND TO PREVENT DAMAGE TO YOUR VEHICLE, DO NOT EXCEED MAXIMUM GROSS VEHICLE WEIGHT RATING (GVWR), AS INDICATED BY THE VEHICLE MANUFACTURER. ALTHOUGH YOUR AIR SPRINGS ARE RATED AT A MAXIMUM INFLATION PRESSURE OF 125 PSI, THE AIR PRESSURE ACTUALLY NEEDED IS DEPENDENT ON YOUR LOAD.

- 5. Always add air to the springs in small quantities, checking the pressure frequently. Sleeves require less air volume than a tire and inflate quickly.
- 6. Should it become necessary to raise the vehicle by the frame, make sure the control system is turned off before lifting.

Troubleshooting Guide

- 1. Leak test the air line connections, the threaded connection into the air spring, and all fittings in the control system.
- 2. Inspect the air lines to be sure none are pinched. Tie straps may be too tight. Loosen or replace the strap and replace leaking components.
- 3. Inspect the air line for holes and cracks. Replace as needed.
- 4. Look for a kink or fold in the air line. Reroute as needed.

If the preceding steps do not solve the problem, it is possibly caused by a failed air spring — either a factory defect or an operating problem. Please call Air Lift at (800) 248-0892 for assistance.

Frequently Asked Questions

- Q. Will installing air springs increase the weight ratings of a vehicle?
 No. Adding air springs will not change the weight ratings (GAWR, GCWR and/or GVWR) of a vehicle. Exceeding the GVWR is dangerous and voids the Air Lift warranty.
- Q. How long should air springs last?
 If the air springs are properly installed and maintained they can last indefinitely.
- Q. Will raising the vehicle on a hoist for service work damage the air springs?
 No. The vehicle can be lifted on a hoist for short-term service work such as tire rotation or oil changes. However, if the vehicle will be on the hoist for a prolonged period of time, support the axle with jack stands in order to take the tension off of the air springs.

MN-958 11



Tuning the Air Pressure

Pressure determination comes down to three things — level vehicle, ride comfort, and stability.

1. Level vehicle

If the vehicle's headlights are shining into the trees or the vehicle is leaning to one side, then it is not level. Raise the air pressure to correct either of these problems and level the vehicle.

2. Ride comfort

If the vehicle has a rough or harsh ride it may be due to either too much pressure or not enough. Try different pressures to determine the best ride comfort. See Air Lift suggested driving air pressure.

3. Stability


Stability translates into safety and should be the priority, meaning the driver may need to sacrifice a perfectly level and comfortable ride. Stability issues include roll control, bounce, dive during braking and sponginess. Tuning out these problems

Checking for Leaks

- 1. Inflate the air spring to 80 PSI.
- 2. Spray all connections and the inflation valves with a solution of 1/5 liquid dish soap and 4/5 water. Spot leaks easily by looking for bubbles in the soapy water.
- 3. After the test, deflate the springs to the minimum pressure required to restore the system to normal ride height.
- 4. Check the air pressure again after 24 hours. A 2-4 PSI loss after initial installation is normal. Retest for leaks if the loss is more than 5 PSI.

Fixing Leaks

- 1. If there is a problem with a swivel fitting:
 - a. Check the air line connection by deflating the spring and removing the line by pulling the collar against the fitting and pulling firmly on the air line. Trim 1" off the end of the air line. Be sure the cut is clean and square (see fig. 19). Reinsert the air line into the push-to-connect fitting.
 - b. Check the threaded connection by tightening the swivel fitting another ½ turn. If it still leaks, deflate the air spring, remove the fitting, and re-coat the threads with thread sealant. Reinstall by hand tightening as much as possible and then use a wrench for an additional two turns.
- 2. If the preceding steps have not resolved the problem, call Air Lift customer service at (800) 248-0892.

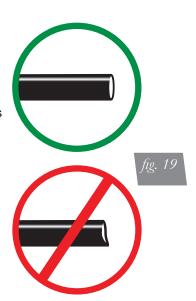



Limited Warranty and Return Policy

Air Lift Company provides a 1-year limited warranty to the original purchaser of Air Lift Performance damper kits from the date of original purchase, that the products will be free from defects in workmanship and materials when used on vehicles as specified by Air Lift Company and under normal operating conditions, subject to the requirements and exclusions set forth in the full Limited Warranty and Return Policy that is available online at www.airliftperformance.com/warranty.

For additional warranty information contact Air Lift Company customer service.

Replacement Part Information

If replacement parts are needed, call Air Lift customer service. Most parts are immediately available and can be shipped the same day.

Contact Air Lift Company customer service at (800) 248-0892 first if:

- Parts are missing from the kit.
- Need technical assistance on installation or operation.
- Broken or defective parts in the kit.
- Wrong parts in the kit.
- Have a warranty claim or question.

Contact the retailer where the kit was purchased:

- If it is necessary to return or exchange the kit for any reason.
- If there is a problem with shipping if shipped from the retailer.
- If there is a problem with the price.

Contact Information

Mailing address P.O. Box 80167

Lansing, MI 48908-0167

Shipping address for returns

2727 Snow Road Lansing, MI 48917

Phone Toll free: (800) 248-0892

International: (517) 322-2144

Email service@airliftcompany.com

Web address www.airliftcompany.com

Air Lift Company reserves the right to make changes and improvements to its products and publications at any time. For the latest version of this manual, contact Air Lift Company at (800) 248-0892 or visit www.airliftperformance.com.

MN-958 13

Need Help?

Contact our customer service department by calling (800) 248-0892. For calls from outside the USA or Canada, our local number is (517) 322-2144.





Kit 78628

Mitsubishi EVO 7/8/9

Rear Application



SEE PAGES 7 AND 8



INSTALLATION GUIDE

For maximum effectiveness and safety, please read these instructions completely before proceeding with installation.

Failure to read these instructions can result in an incorrect installation.

Notation Explanation
Installation Diagram
Installing the Air Suspension. Preparing the Vehicle
Before Operating
Product Use, Maintenance and Servicing. 1 Suggested Driving and Maximum Air Pressures. 12 Maintaining and Operating 12
Troubleshooting Guide1
Frequently Asked Questions
Tuning the Air Pressure1
Checking for Leaks
Fixing Leaks1
Warranty & Return Policy
Replacement Information
Contact Information 1



Introduction

The purpose of this publication is to assist with the installation, maintenance and troubleshooting of this Mitsubishi EVO 7/8/9 Performance kit.

It is important to read and understand the entire installation guide before beginning installation or performing any maintenance, service or repair. The information includes a hardware list, step-by-step installation information, maintenance tips, safety information and a troubleshooting guide.

Air Lift Performance reserves the right to make changes and improvements to its products and publications at any time. For the latest version of this manual, contact Air Lift Performance at (800) 248-0892 or visit our website at www.airliftperformance.com.

NOTATION EXPLANATION

Hazard notations appear in various locations in this publication. Information which is highlighted by one of these notations must be observed to help minimize risk of personal injury or possible improper installation which may render the vehicle unsafe. Notes are used to help emphasize areas of procedural importance and provide helpful suggestions. The following definitions explain the use of these notations as they appear throughout this guide.



INDICATES IMMEDIATE HAZARDS WHICH WILL RESULT IN SEVERE PERSONAL INJURY OR DEATH.



INDICATES HAZARDS OR UNSAFE PRACTICES WHICH COULD RESULT IN SEVERE PERSONAL INJURY OR DEATH.



INDICATES HAZARDS OR UNSAFE PRACTICES WHICH COULD RESULT IN DAMAGE TO THE MACHINE OR MINOR PERSONAL INJURY.

NOTE

Indicates a procedure, practice or hint which is important to highlight.

IMPORTANT SAFETY NOTICES

The installation of this kit does not alter the Gross Vehicle Weight Rating (GVWR) or payload of the vehicle. Check your vehicle's owner's manual and do not exceed the maximum load listed for your vehicle.

Gross Vehicle Weight Rating: The maximum allowable weight of the fully loaded vehicle (including passengers and cargo). This number — along with other weight limits, as well as tire, rim size and inflation pressure data — is shown on the vehicle's Safety Compliance Certification Label.

Payload: The combined, maximum allowable weight of cargo and passengers that the vehicle is designed to carry. Payload is GVWR minus the Base Curb Weight.




DO NOT INFLATE AIR SPRINGS WHILE OFF OF THE VEHICLE. DAMAGE TO ASSEMBLY MAY RESULT AND VOID WARRANTY.



DO NOT WELD TO, OR MODIFY PERFORMANCE STRUTS/SHOCKS IN ANY WAY. DAMAGE TO UNIT MAY OCCUR AND WILL VOID WARRANTY.





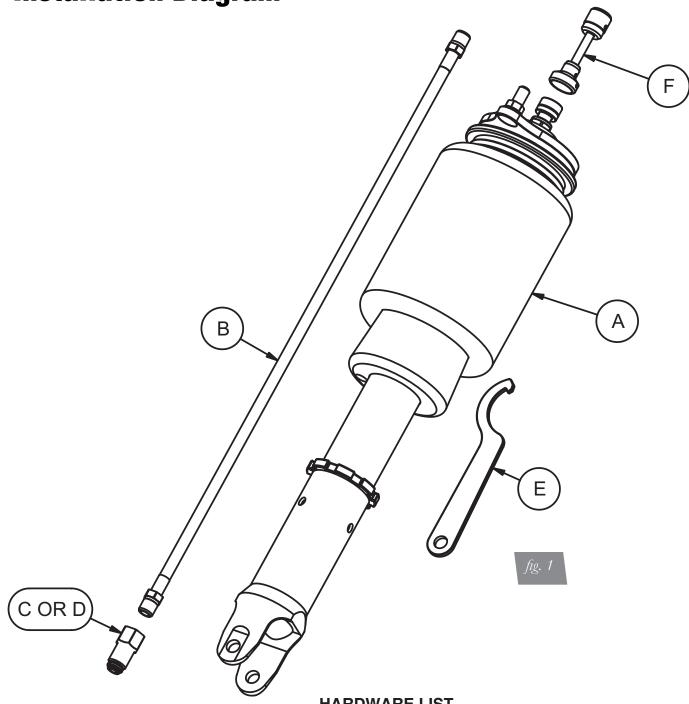

HARDWARE LIST

Item A	Part #	Description	
В	20997	Leader Hose, 1/4" ID	
С	21810	Union, 1/4"FNPT X 1/4" PTC, DOT	2
D	21987	Union, 1/4"FNPT X 3/8" PTC, DOT	2
Ε		Spanner Wrench	1
F		Flexible Adjuster Extension	2

STOP!

Missing or damaged parts? Call Air Lift customer service at (800) 248-0892 for a replacement part.

Installing the Air Suspension

PREPARING THE VEHICLE

- 1. Elevate and support the vehicle from approved lifting points.
- 2. Remove the rear wheels (fig. 2).



REMOVING THE STOCK SUSPENSION

1. Remove the lower shock mount bolt (figs. 3 and 4).





2. Unbolt the lower control arm from the knuckle (fig. 5).





3. Remove the two upper bracket bolts (fig. 6) and remove the shock assembly from the vehicle (fig. 7).

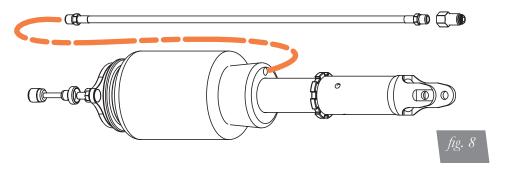





fig. 7

AIR SUSPENSION INSTALLATION

1. Begin by installing the leader line into the air spring. Apply thread sealant to the threads of the leader hose. Tighten the appropriate fitting to the air line (one and three-quarter turns beyond hand-tight). Tighten the leader line into the air spring (one and three-quarter turns beyond hand-tight) (fig. 8).



2. Fully seat the flexible adjuster extension on the damping adjuster and torque the set screw a ½-turn beyond hand-tight (fig. 9).

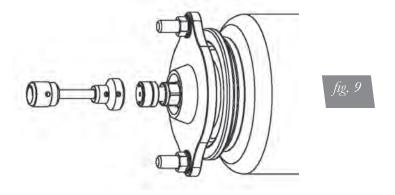

MN-959 5

3. Attach the upper mount and torque nuts to 44 Nm (33 ft-lbs.) (fig. 10).



4. Reattach the lower control arm to the knuckle (fig. 11). Torque the nut/bolt to 88 Nm (65 ft-lbs.).



5. Align and attach the lower shock mount with the control arm (fig. 11). Torque to 88 Nm (65 ft-lbs.).



- 6. Fully compress the suspension using a jack. With the suspension compressed, review the best routing for the leader hose that is clear of all suspension components and axle. Routing should also allow for the suspension to extend without kinking or pulling the line tight or rubbing on other components. Following the brake line routing is often a good place to start. Check clearances to all other components.
- 7. With the suspension fully compressed, take a measurement from the fender to some reference point typically the center of the axle. Record this measurement as Max Compression.
- 8. Cycle the suspension to Max Extension and record the measurement from the same reference points.



9. Add ME and MC then divide by 2. Set the suspension to this point. This position will give 50% stroke in either direction and is a starting point for ride height (fig. 13).

Formula for Calculating Ride Height

(ME+MC)÷2=MID STROKE



T 11 4


10. With the suspension at this position, loosen, then re-torque the lower control arm bolts to manufacturer's specifications (Table 1).

		Table I
Torque Spec	ifications	
Location	Nm	ft-lbs.
Lower control arm to knuckle	88+/-10	65+/-7
Lower control arm to shock	88+/-10	65+/-7
Lower control arm to cross-member	93+/-15	69+/-11
Upper control arm rearward attaching bolt	64+/-4	47+/-3
Wheel lugs	98+/-10	73-/+7
Air fitting (use thread sealant)	1-and-3/4 turns b	eyond hand-tight



AFTER INITIAL INSTALLATION OF YOUR STRUTS/SHOCKS:

- DO NOT CYCLE THE SUSPENSION WITH THE AIR-LINE CONNECTED TO THE LEADER HOSE WITHOUT FIRST ADDING AIR SPRING PRESSURE. DOING SO MAY CAUSE THE AIR SPRING TO IMPROPERLY INFLATE (FIG. 20). IT IS SAFE TO CYCLE THE SUSPENSION TO CHECK FOR CLEARANCES ETC. WITH THE LEADER HOSE OPEN TO ATMOSPHERE (DISCONNECTED FROM AIR-LINE).
- BEFORE SETTING VEHICLE ON THE GROUND FOR THE FIRST TIME, IT IS VERY IMPORTANT TO INFLATE THE AIR SPRINGS TO AT LEAST 50 PSI. THIS WILL PREVENT ANY POSSIBILITY OF THE AIR SPRING KICKING OUT AND CAUSING A LEAK (FIG. 21).





Caused by cycling with airline attached without pressure.
Remove air-line from spring to release vacuum and re-attach.
Inflate to 50+ PSI before lowering car to ground.





Shows what spring looks like after lowering car to ground with <50psi and raising it with air pressure.

Do NOT drive!



fig. 22


Shows what spring looks like when installed correctly.

MN-959 7





WHEN THREADING THE SHOCK ASSEMBLY HEIGHT SHORTER, CHECK FOR CLEARANCE BETWEEN THE AIR SPRING'S LOWER PISTON AND THE UPPER CONTROL ARM AT MAX EXTENSION OF THE SUSPENSION (FIG. 18). IT IS NOT ADVISED TO THREAD THE ASSEMBLY SHORTER THAN THE DIMENSION SHOWN IN FIGURE 19.

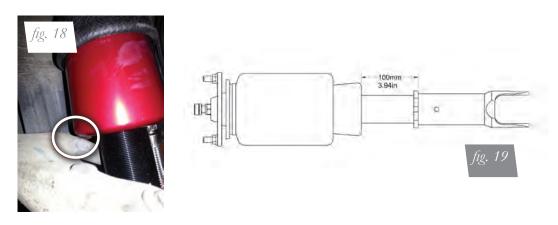


DAMPING ADJUSTMENT

The struts in this kit have 30 settings, or "clicks", of adjustable compression and rebound damping characteristics. Damping is changed through the strut rod using the supplied adjuster (figs. 14 and 15) or a 3mm allen wrench.

Turn the adjuster clockwise and the damping settings are hardened. Turn the adjuster counterclockwise and the damping is softened.

Each strut is preset to "-20 clicks". This means that the strut is adjusted 20 clicks away from full stiff. Counting down from full stiff is the preferred method of keeping track of, or setting, damping. This setting was developed on a 2006 EVO 9 MR and may need to be adjusted to different vehicles and driving characteristics.

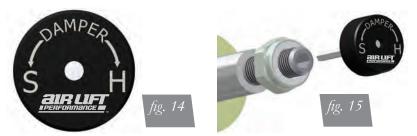

ALIGNING THE VEHICLE

- 1. Using the control system, set the vehicle height to the new custom ride height.
- 2. If the custom ride height is lower than stock, we recommend loosening all pivot points (bolts, nuts) on any control arm, strut arm or radius rod that contains bushings. Once they have been loosened, re-torque to stock specifications.

NOTE


It may be necessary to cycle the suspension to loosen the bushing up from its mount. This will help re-orient the bushing at its new position and increase life of the bushings based on the custom ride height.



ADJUSTING EXTENDED OR DROP HEIGHT USING LOWER MOUNT

Your struts have been pre-set at the factory to provide maximum drop height while maintaining adequate tire clearance to the air spring. If you wish to gain more extended height (lift), which is the same as reducing drop height, or want to lower the chassis further and there is still adjustment available at the lower mount, please use the following procedure:

- 1. Support the vehicle with jack stands or a hoist at approved lifting points.
- 2. Remove the wheel.
- 3. Using the supplied spanner wrench, loosen the lower locking collar (fig. 16).

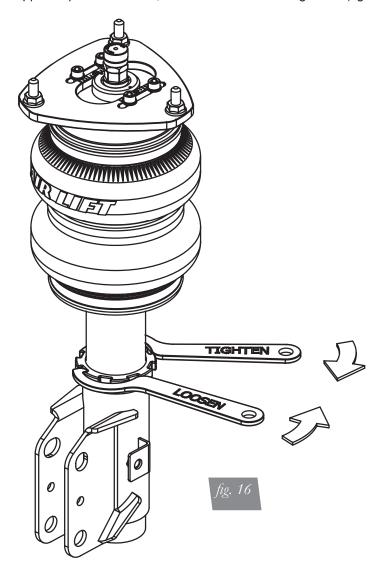

- 4. Deflate the air spring to 0 PSI on the corner you are adjusting.
- 5. Disconnect lower mount from suspension.
- 6. Spin the lower mount to the desired location.

NOTE

Not all models will have further drop height available.

- 7. Re-install lower mount to suspension and torque fasteners.
- 8. Tighten the lower locking collar to the lower mount using significant force.


MN-959 9



WHEN ADJUSTING HEIGHT UPWARDS, MAKE SURE THAT THE STRUT BODY ENGAGES ALL THE THREADS OF THE LOWER MOUNT (FIG. 17). WHEN ADJUSTING DOWNWARDS, MAKE SURE THERE IS ADEQUATE AIR SPRING CLEARANCE TO THE TIRE/WHEEL ASSEMBLY. CLEARANCE MUST BE CHECKED WITH SYSTEM FULLY DEFLATED AS WELL AS FULLY INFLATED TO ENSURE THAT NO RUBBING OCCURS. FAILURE TO MAINTAIN ADEQUATE CLEARANCE CAN RESULT IN AIR SPRING FAILURE AND WILL NOT BE COVERED UNDER WARRANTY.

A CAUTION

DO NOT ADJUST HEIGHT BY SPINNING AIR SPRING ON STRUT! DOING SO MAY CAUSE AN AIR LEAK AND COMPROMISE THE ASSEMBLY.

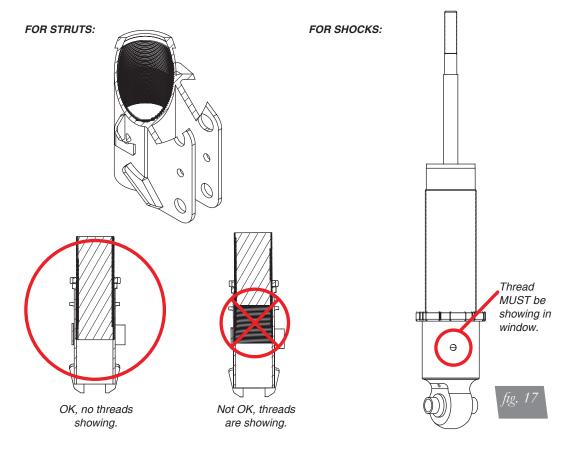



Before Operating



MAKE SURE THE FRONT WHEELS ARE STRAIGHT WHEN DEFLATING AND REINFLATING AIR BAGS.

- 1. Inflate and deflate the system (do not exceed 125 PSI) to check for clearance or binding issues. With the air springs deflated, check clearances on everything so as not to pinch brake lines, vent tubes, etc. Clear lines if necessary.
- 2. Inflate the air springs to 75-90 PSI and check all connections for leaks.
- 3. Air Lift part #27669 or #27671, AutoPilot V2 Air Management System, is highly recommended for this product.
- 4. Please familiarize yourself further with this product by reading the Product Use, Maintenance and Servicing section.

INSTALLATION CHECKLIST

 Clearance test — Inflate the air springs to 75-90 PSI and make clearance from anything that might rub against each sleeve. E brake drum, frame, shock absorbers and brake cables. Leak test before road test — Inflate the air springs to 75-90 PSI a for leaks. All leaks must be eliminated before the vehicle is road. Heat test — Be sure there is sufficient clearance from heat so springs and air lines. If a heat shield was included in the kit, in shield, but one is required, call Air Lift customer service at (80). Fastener test — Recheck all bolts for proper torque. 	Be sure to check the tire, and check all connections ad tested. ources, at least 6" for air stall it. If there is no heat
for leaks. All leaks must be eliminated before the vehicle is road. Heat test — Be sure there is sufficient clearance from heat so springs and air lines. If a heat shield was included in the kit, in shield, but one is required, call Air Lift customer service at (80). Fastener test — Recheck all bolts for proper torque.	ad tested. ources, at least 6" for air stall it. If there is no heat
springs and air lines. If a heat shield was included in the kit, in shield, but one is required, call Air Lift customer service at (80 □ Fastener test — Recheck all bolts for proper torque.	stall it. If there is no heat
□ Road test — The vehicle should be road tested after the presprings to recommended driving pressures. Drive the vehicle clearance, loose fasteners and air leaks.	
Operating instructions — If professionally installed, the instruction operating instructions with the owner. Be sure to provide the paperwork that came with the kit.	
Technician's Signature	
Date	
POST-INSTALLATION CHECKLIST	
POSI-INSTALLATION CHECKLIST ☐ Overnight leak down test — Recheck air pressure after the very 24 hours. If the pressure has dropped more than 5 PSI, then be fixed. Either fix the leak yourself or return to the installer for	there is a leak that must
 □ Overnight leak down test — Recheck air pressure after the very 24 hours. If the pressure has dropped more than 5 PSI, then 	there is a leak that must r service. essure should always be



Product Use, Maintenance and Servicing

Suggested Driving Air Pressure	Maximum Air Pressure
55-70 PSI	125 PSI
FAILURE TO MAINTAIN ADEQUATE MINIMUM PRESSURE (OR PRESSURE	

FAILURE TO MAINTAIN ADEQUATE MINIMUM PRESSURE (OR PRESSURE PROPORTIONAL TO LOAD) WILL RESULT IN BOTTOMING OUT, OVER-EXTENSION OR RUBBING AGAINST ANOTHER COMPONENT AND WILL **VOID THE WARRANTY**.

MAINTENANCE GUIDELINES

NOTE

By following these steps, vehicle owners will obtain the longest life and best results from their air spring.

- 1. Check the air pressure before driving.
- 2. Never inflate beyond 125 PSI.
- 3. If you develop an air leak in the system, use a soapy water solution to check all air line connections, before deflating and removing the spring.
- 4. When increasing load, always adjust the air pressure to maintain normal ride height. Increase or decrease pressure from the system as necessary to attain normal ride height for optimal ride and handling. Remember that loads carried behind the axle (including tongue loads) require more leveling force (pressure) than those carried directly over the axle.



FOR YOUR SAFETY AND TO PREVENT DAMAGE TO YOUR VEHICLE, DO NOT EXCEED MAXIMUM GROSS VEHICLE WEIGHT RATING (GVWR), AS INDICATED BY THE VEHICLE MANUFACTURER. ALTHOUGH YOUR AIR SPRINGS ARE RATED AT A MAXIMUM INFLATION PRESSURE OF 125 PSI, THE AIR PRESSURE ACTUALLY NEEDED IS DEPENDENT ON YOUR LOAD.

- 5. Always add air to the springs in small quantities, checking the pressure frequently. Sleeves require less air volume than a tire and inflate quickly.
- 6. Should it become necessary to raise the vehicle by the frame, make sure the control system is turned off before lifting.

Troubleshooting Guide

- 1. Leak test the air line connections, the threaded connection into the air spring, and all fittings in the control system.
- 2. Inspect the air lines to be sure none are pinched. Tie straps may be too tight. Loosen or replace the strap and replace leaking components.
- 3. Inspect the air line for holes and cracks. Replace as needed.
- 4. Look for a kink or fold in the air line. Reroute as needed.

If the preceding steps do not solve the problem, it is possibly caused by a failed air spring — either a factory defect or an operating problem. Please call Air Lift at (800) 248-0892 for assistance.

Frequently Asked Questions

Q. Will installing air springs increase the weight ratings of a vehicle?
No. Adding air springs will not change the weight ratings (GAWR, GCWR and/or GVWR) of a vehicle. Exceeding the GVWR is dangerous and voids the Air Lift warranty.

Q. How long should air springs last?

If the air springs are properly installed and maintained they can last indefinitely.

Q. Will raising the vehicle on a hoist for service work damage the air springs?

No. The vehicle can be lifted on a hoist for short-term service work such as tire rotation or oil changes. However, if the vehicle will be on the hoist for a prolonged period of time, support the axle with jack stands in order to take the tension off of the air springs.



Tuning the Air Pressure

Pressure determination comes down to three things — level vehicle, ride comfort, and stability.

1. Level vehicle

If the vehicle's headlights are shining into the trees or the vehicle is leaning to one side, then it is not level. Raise the air pressure to correct either of these problems and level the vehicle.

2. Ride comfort

If the vehicle has a rough or harsh ride it may be due to either too much pressure or not enough. Try different pressures to determine the best ride comfort. See Air Lift suggested driving air pressure.

3. Stability


Stability translates into safety and should be the priority, meaning the driver may need to sacrifice a perfectly level and comfortable ride. Stability issues include roll control, bounce, dive during braking and sponginess. Tuning out these problems usually requires additional air pressure, strut damping, or both.

Checking for leaks

- 1. Inflate the air spring to 80 PSI.
- 2. Spray all connections and the inflation valves with a solution of 1/5 liquid dish soap and 4/5 water. Spot leaks easily by looking for bubbles in the soapy water.
- 3. After the test, deflate the springs to the minimum pressure required to restore the system to normal ride height.
- 4. Check the air pressure again after 24 hours. A 2-4 PSI loss after initial installation is normal. Retest for leaks if the loss is more than 5 PSI.

Fixing Leaks

- 1. If there is a problem with a swivel fitting:
 - a. Check the air line connection by deflating the spring and removing the line by pulling the collar against the fitting and pulling firmly on the air line. Trim 1" off the end of the air line. Be sure the cut is clean and square (see fig. 23). Reinsert the air line into the push-to-connect fitting.
 - b. Check the threaded connection by tightening the swivel fitting another ½ turn. If it still leaks, deflate the air spring, remove the fitting, and re-coat the threads with thread sealant. Reinstall by hand tightening as much as possible and then use a wrench for an additional two turns.
- 2. If the preceding steps have not resolved the problem, call Air Lift customer service at (800) 248-0892.

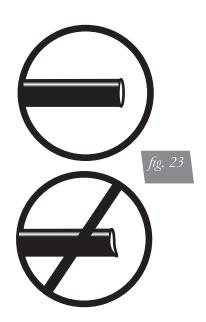



Warranty and Returns Policy

Air Lift Performance warrants its performance products for one year to the original purchaser against manufacturing defects one year from the date of purchase when used on cars and trucks as specified under normal operating conditions. The warranty does not apply to products that have been improperly applied, improperly installed, or which have not been maintained in accordance with installation instructions furnished with all products. The consumer will be responsible for removing (labor charges) the defective product from the vehicle and returning it, transportation costs prepaid, to the dealer from which it was purchased or to Air Lift Performance for verification.

Air Lift will repair or replace, at its option, defective products or components. A minimum \$10.00 shipping and handling charge will apply to all warranty claims. Before returning any defective product, you must call Air Lift at (800) 248-0892 in the U.S. and Canada (elsewhere, (517) 322-2144) for a Returned Materials Authorization (RMA) number. Returns to Air Lift can be sent to: Air Lift Performance • 2727 Snow Road • Lansing, MI • 48917.

Product failures resulting from abnormal use or misuse are excluded from this warranty. The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages is not covered. The consumer is responsible for installation/reinstallation (labor charges) of the product. Air Lift Performance reserves the right to change the design of any product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights and you may also have other rights that may vary from state-to-state. Some states do not allow limitations on how long an implied warranty lasts or allow the exclusion or limitation of incidental or consequential damages. The above limitation or exclusion may not apply to you. There are no warranties, expressed or implied including any implied warranties of merchantability and fitness, which extend beyond this warranty period. There are no warranties that extend beyond the description on the face hereof. Seller disclaims the implied warranty of merchantability. (Dated proof of purchase required.)

Replacement Information

If you need replacement parts, contact the local dealer or call Air Lift customer service at (800) 248-0892. Most parts are immediately available and can be shipped the same day.

Contact Air Lift Performance customer service at (800) 248-0892 first if:

- · Parts are missing from the kit.
- Need technical assistance on installation or operation.
- · Broken or defective parts in the kit.
- · Wrong parts in the kit.
- Have a warranty claim or question.

Contact the retailer where the kit was purchased:

- If it is necessary to return or exchange the kit for any reason.
- · If there is a problem with shipping if shipped from the retailer.
- · If there is a problem with the price.

Contact Information

If you have any questions, comments or need technical assistance contact our customer service department by calling (800) 248-0892. For calls from outside the USA or Canada, our local number is (517) 322-2144. You may also contact customer service anytime by e-mail at techsupport@airliftperformance.com.

For inquiries by mail, our address is PO Box 80167, Lansing, MI 48908-0167. Our shipping address for returns is 2727 Snow Road, Lansing, MI 48917.

You may also contact our sales team anytime by e-mail at sales@airliftperformance.com or on the web at www.airliftperformance.com.

Notes

MN-959 15

Notes

Notes

Need Help?

Contact our customer service department by calling (800) 248-0892. For calls from outside the USA or Canada, our local number is (517) 322-2144.



Thank you for purchasing Air Lift Performance products!